


Hexagonal locknut

2xx M

Hexagonal locknut	Brass CuZn39Pb3, nickel-plated
Internal thread	Pg as per DIN 40430


Properties


Temperature range (°C)	-60 +200	<ul style="list-style-type: none"> for secure tightening of cable glands and accessories
------------------------	-------------	---

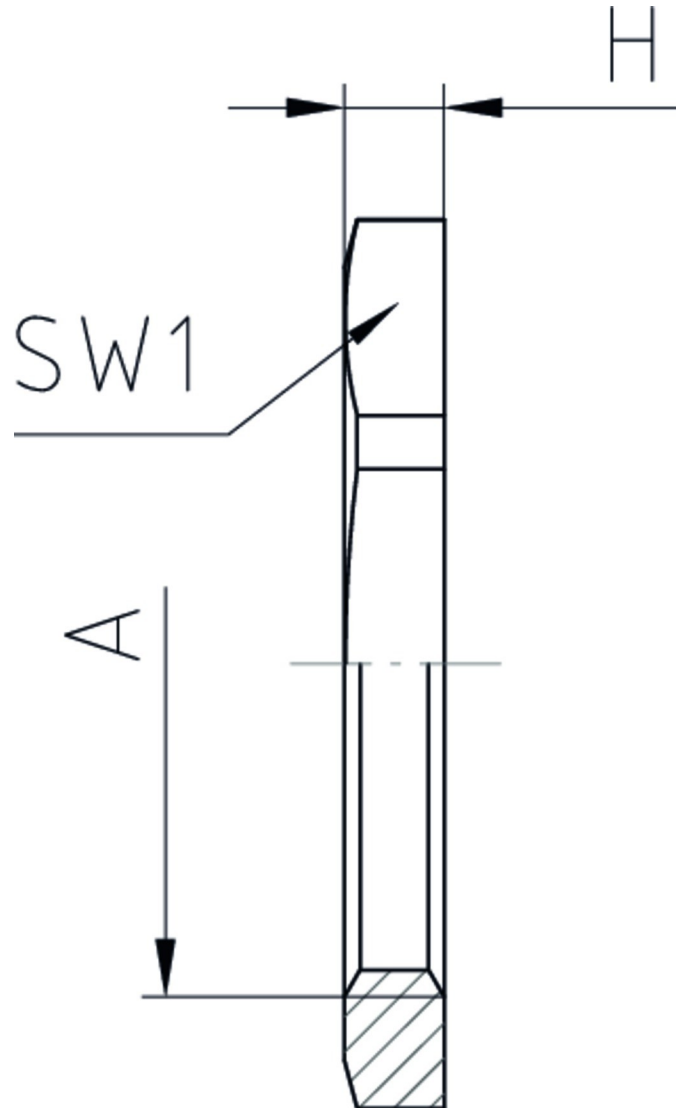

Features

Standard

A	SW1	H		Part No.
Pg 7	15	2,8	100	207 M
Pg 9	18	2,8	100	209 M

A	SW1	H		Part No.
Pg 11	21	3	100	211 M
Pg 13,5	23	3	100	213 M
Pg 16	26	3	100	216 M
Pg 21	32	3,5	100	221 M
Pg 29	41	4	100	229 M
Pg 36	51	5	50	236 M
Pg 42	60	5	50	242 M
Pg 48	64	5,5	50	248 M